




Model	
ECN642SS	
Features	
Controls	Multi-Function Electronic Touch Controls
Illumination	4, 40 Watt Halogen Lamps (Bulbs Included), 2 Intensities
Blower Type	4-speed, 600 CFM
CRS CFM Reduction (< 300 CFM)	Included Function
Blower Performance	Speed 1, 160 CFM, 1.6 Sones
	Speed 2, 280 CFM, 3.5 Sones
	Speed 3, 470 CFM, 6.5 Sones
	Speed 4, 600 CFM, 8.7 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole Filter (X1)
Ducting	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct transition	6" Round with Back Draft Damper (top)
Chimney (ducted out)	For ceiling heights 7'5" to 10'2"
Chimney (recirculating)	For ceiling heights 7'9" to 10'6" (with appropriate accessories)
Exterior Appearance	
Stainless Steel grade	430
Electrical Requirements	
Electrical requirements	120V-60 HZ / 530 Watt at 4.4 Amps
Dimensions	
Dimensions	42" (L) X 25 3/16" (P) X 1 15/16" (H)
Accessories (optional)	
Extension Chimney Kit (ducted out)	EXXCEK06 For ceiling heights 9'0" to 12'0" (with appropriate accessories)
Extension Chimney Kit (recirculating)	EXXCEK06 For ceiling heights 9'0" to 12'6" (with appropriate accessories)
Recirculating Kit	KIT02665
Warranty	
Complete 2 years warranty	Entire Appliance; In-Home; Parts & Labour

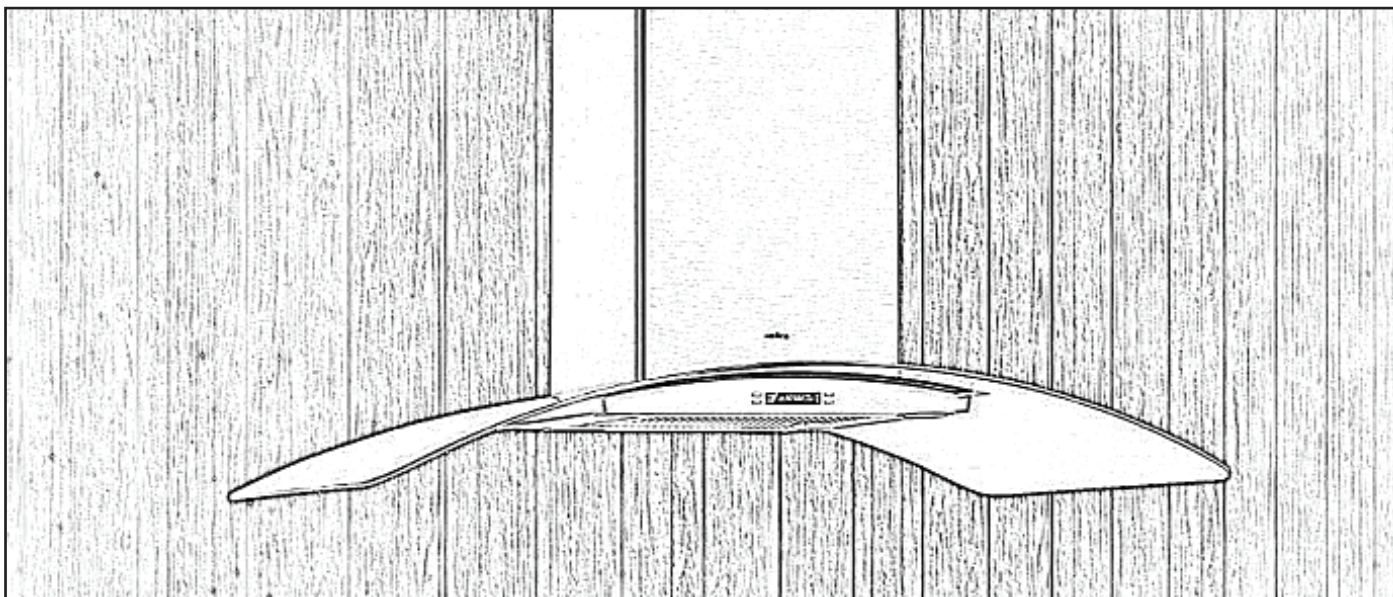

CINGOLI (S2)

Installation Requirements
ECN636/642S2

Recommended height above countertop (clearance)

	Gas surface	Electric surface
Minimum	30 inches	24 inches
Maximum	36 inches	30 inches

Ceiling Height


(based on the recommended height installation)

Telescopic Chimney Extension	7'10" - 10'0"
------------------------------	---------------

Duct Transition

Duct transition	6" Round (top)
Back Draft Damper	Included

Dimensions

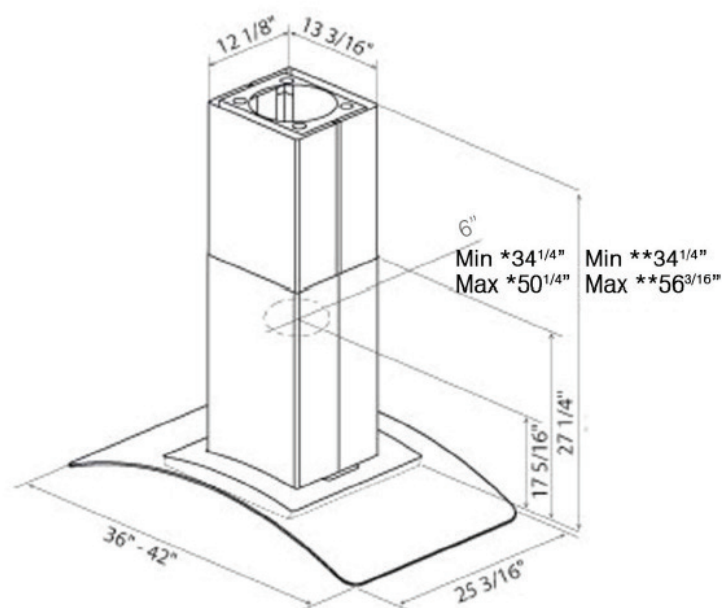

* Ducted
** Recirculating Installation

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

Need technical assistance ? 1(888) 651-2534